

GD 470-SJ

Glass Break Detector for Laminated Glass with junction box, Glued, Relay output

Technical data

Maximum coverage	2 m radius (Up to 8mm and P8B)
Approvals	EN 50131-2-7-2 Grade 2 (EN-ST-000290), VdS 2332 Klasse B (G122508), SBSC 22-95 (Klass 2)
Supply voltage	5-15 VDC
Current consumption	1,5mA (3 mA in alarm state)
Alarm output	Transistor output
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Connection	Spiral cable (35 cm - 70 cm) made of PUR with RJ12 contact
Housing material	ABS Plastic
Colour	White
Operating temperature range	-40 - +70°C
Housing protection class	IP 67
Dimensions (H x Ø) mm	11 x 26
Dimensions (L x W x H) mm	91 x 31 x 23 (box)
Grade	3

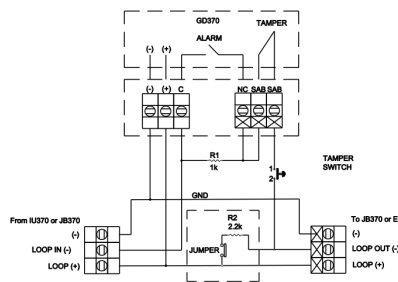

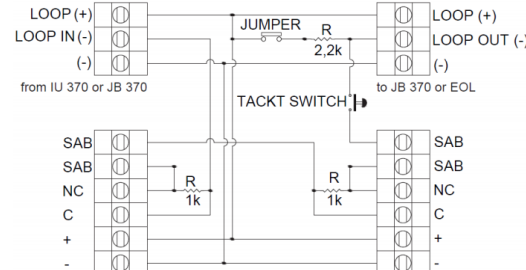

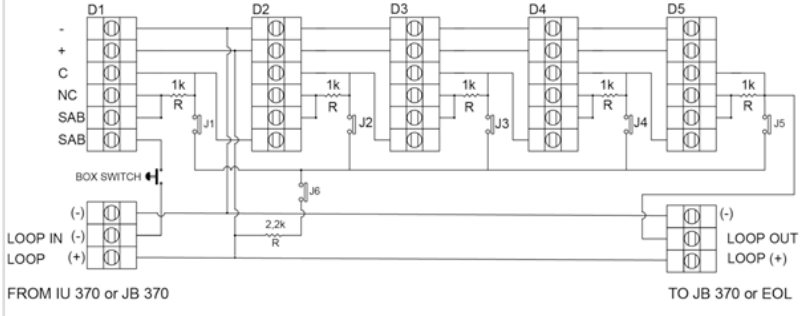


GD 470-S glass breaker detector with relay output has the same functions as GD 470 which can be connected directly to an input to the control panel. The detector has a spiral cable with modular contact which is connected in the junction box JB 103-6, which means that it can be easily and quickly disconnected from the detector loop at e.g. plastering a window

ORDERING INFORMATION

Model	Description
GD 470-SJ	Glass breaker detector universal with relay output, glued spiral cable in quality PUR with RJ12 connector and junction box JB 103-6

Related products and accessories

	JB 370 DISCONTINUE D - Replaced by JB 370-2 Junction Box for GD 370 and GD 470 Glass Break Detectors	
	JB 370-2 Junction Box for GD 370 and GD 470 Glass Break Detectors	
	JB 370-5 Junction Box for GD 370 Glass Break Detector	
	CG 100 Cable Conduit	
	GDK 100 Adhesive Kit	

Related products and accessories

 A black, rectangular test unit with a small red indicator light on the top surface.	GVT 500 DISCONTINUED - Replaced by GVT 5000 Test unit for GD 300/GD 400 Glass Break Detectors.
 A white, rectangular test unit with a red emergency stop button and a cable connected to a small black circular sensor.	GVT 5000 Test Unit for Glass Break and Vibration Detectors