


Elongated Fittings

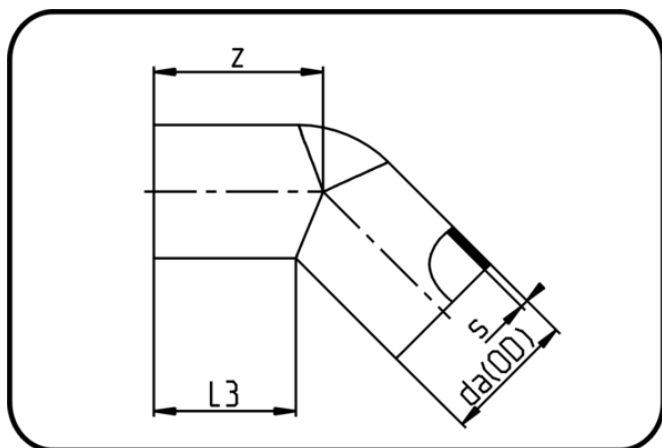

Code: 060

- Elbow 45°
- long spigot
- injection moulded
- Butt + E-socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L3 mm	Weight
63	25.060.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	80	64,5	0.118
75	25.060.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	90	71	0.187
90	25.060.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	101	80	0.295
110	70.060.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	108	83	0.494
125	25.060.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	130,5	99,5	0.718
140	70.060.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	129	99	0.88
160	25.060.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	149	114	1.34
180	70.060.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	174	133,5	2.06
200	25.060.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	170	120	2.24
225	25.060.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	175,5	128	3.16
250	25.060.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	217	158	4.82
280	70.060.0280.17	280X16,6 SDR17 ISO S-8	280	16,6	236	174	6.58
315	25.060.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	251	177	9
20	25.060.0020.11	20X3,0 SDR11 ISO S-5	20	3	44	39	0.015
25	25.060.0025.11	25X3,0 SDR11 ISO S-5	25	3	48	42	0.02
32	25.060.0032.11	32X3,0 SDR11 ISO S-5	32	3	57	49	0.035
40	25.060.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	63	53	0.057
50	25.060.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	66,5	57	0.094
63	25.060.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	80	65,5	0.172
75	25.060.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	90	70	0.274
90	25.060.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	104	82	0.44
110	25.060.0110.11	110X10,0 SDR11 ISO S-5	110	10	108	82	0.679
125	25.060.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	126	99,5	1.06

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L3 mm	Weight
140	70.060.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	135	100	1.4
160	25.060.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	150	116,5	2.06
180	25.060.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	176,5	131,5	2.86
200	70.060.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	167	122	3.58
225	25.060.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	173,5	125,5	4.76
250	25.060.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	217	158	7.16
280	25.060.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	238	168	9.62
315	25.060.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	248	176	12.9