


Elongated Fittings

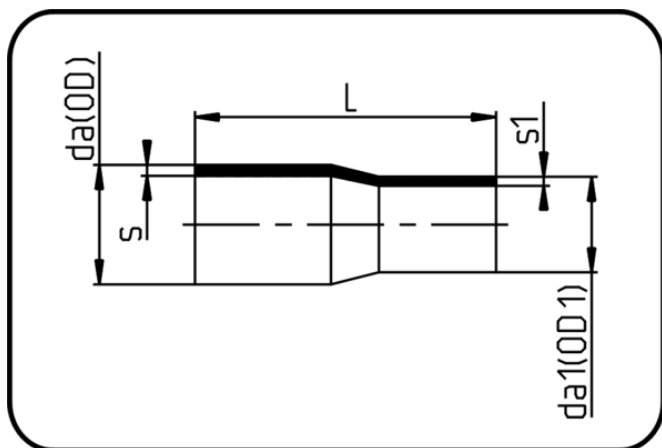

Code: 067

- Reducer concentric
- long spigot
- injection moulded
- Butt + E-socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
75/63	25.067.7563.17	75/63 SDR17 ISO S-8	75	63	4,5	146	3,8	0.129
90/63	25.067.9063.17	90/63 SDR17 ISO S-8	90	63	5,4	172	3,8	0.199
90/75	25.067.9075.17	90/75 SDR17 ISO S-8	90	75	5,4	163	4,5	0.196
110/63	25.067.1163.17	110/63 SDR17 ISO S-8	110	63	6,6	182	3,8	0.297
110/90	25.067.1190.17	110/90 SDR17 ISO S-8	110	90	6,6	175	5,4	0.331
125/63	70.067.1263.17	125/63 SDR17 ISO S-8	125	63	7,4	187	3,8	0.375
125/90	25.067.1290.17	125/90 SDR17 ISO S-8	125	90	7,4	191,5	5,4	0.438
125/110	25.067.1211.17	125/110 SDR17 ISO S-8	125	110	7,4	193	6,6	0.483
140/125	25.067.1412.17	140/125 SDR17 ISO S-8	140	125	8,3	207	7,4	0.65
160/90	25.067.1690.17	160/90 SDR17 ISO S-8	160	90	9,5	215	5,4	0.76
160/110	25.067.1611.17	160/110 SDR17 ISO S-8	160	110	9,5	222	6,6	0.802
160/125	25.067.1612.17	160/125 SDR17 ISO S-8	160	125	9,5	227	7,4	0.852
160/140	70.067.1614.17	160/140 SDR17 ISO S-8	160	140	9,5	234	8,3	0.945
180/125	25.067.1812.17	180/125 SDR17 ISO S-8	180	125	10,7	270	7,4	1.26
180/160	25.067.1816.17	180/160 SDR17 ISO S-8	180	160	10,7	270	9,5	1.38
200/160	25.067.2016.17	200/160 SDR17 ISO S-8	200	160	11,9	253	9,5	1.56
225/160	25.067.2216.17	225/160 SDR17 ISO S-8	225	160	13,4	258	9,5	1.839
250/160	25.067.2516.17	250/160 SDR17 ISO S-8	250	160	14,8	318	9,5	2.762
250/200	25.067.2521.17	250/200 SDR17 ISO S-8	250	200	14,8	317	11,9	3.06
250/225	25.067.2522.17	250/225 SDR17 ISO S-8	250	225	14,8	312	13,4	3.34
280/250	25.067.2825.17	280/250 SDR17 ISO S-8	280	250	16,6	355	14,8	4.52
315/200	25.067.3120.17	315/200 SDR17 ISO S-8	315	200	18,7	375	11,9	5.4
315/225	25.067.3122.17	315/225 SDR17 ISO S-8	315	225	18,7	375	13,4	5.6

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
315/250	25.067.3125.17	315/250 SDR17 ISO S-8	315	250	18,7	375	14,8	5.76
25/20	25.067.2520.11	25/20 SDR11 ISO S-5	25	20	3	87	3	0.016
32/20	25.067.3220.11	32/20 SDR11 ISO S-5	32	20	3	95	3	0.022
32/25	70.067.3225.11	32/25 SDR11 ISO S-5	32	25	3	95	3	0.024
40/20	25.067.4020.11	40/20 SDR11 ISO S-5	40	20	3,7	102	3	0.032
40/25	25.067.4025.11	40/25 SDR11 ISO S-5	40	25	3,7	102	3	0.033
40/32	25.067.4032.11	40/32 SDR11 ISO S-5	40	32	3,7	101	3	0.04
50/25	70.067.5025.11	50/25 SDR11 ISO S-5	50	25	4,6	118	3	0.054
50/32	70.067.5032.11	50/32 SDR11 ISO S-5	50	32	4,6	118	3	0.06
50/40	70.067.5040.11	50/40 SDR11 ISO S-5	50	40	4,6	126	3,7	0.071
63/32	25.067.6332.11	63/32 SDR11 ISO S-5	63	32	5,8	135	3	0.098
63/40	25.067.6340.11	63/40 SDR11 ISO S-5	63	40	5,8	129	3,7	0.102
63/50	70.067.6350.11	63/50 SDR11 ISO S-5	63	50	5,8	148	4,6	0.134
75/50	70.067.7550.11	75/50 SDR11 ISO S-5	75	50	6,8	148	4,6	0.168
75/63	25.067.7563.11	75/63 SDR11 ISO S-5	75	63	6,8	148	5,8	0.193
90/63	25.067.9063.11	90/63 SDR11 ISO S-5	90	63	8,2	172	5,8	0.29
90/75	25.067.9075.11	90/75 SDR11 ISO S-5	90	75	8,2	163	6,8	0.293
110/40	70.067.1140.11	110/40 SDR11 ISO S-5	110	40	10	176	3,7	0.362
110/63	70.067.1163.11	110/63 SDR11 ISO S-5	110	63	10	178	5,8	0.425
110/90	25.067.1190.11	110/90 SDR11 ISO S-5	110	90	10	177	8,2	0.499
125/63	25.067.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	195	5,8	0.56
125/90	25.067.1290.11	125/90 SDR11 ISO S-5	125	90	11,4	200	8,2	0.635
125/110	70.067.1211.11	125/110 SDR11 ISO S-5	125	110	11,4	200	10	0.739
140/125	70.067.1412.11	140/125 SDR11 ISO S-5	140	125	12,7	211	11,4	0.992
160/90	25.067.1690.11	160/90 SDR11 ISO S-5	160	90	14,6	217	8,2	1.06
160/110	25.067.1611.11	160/110 SDR11 ISO S-5	160	110	14,6	225	10	1.18
160/125	25.067.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	231	11,4	1.32
160/140	25.067.1614.11	160/140 SDR11 ISO S-5	160	140	14,6	229	12,7	1.36
180/125	25.067.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	270	11,4	1.82
180/160	25.067.1816.11	180/160 SDR11 ISO S-5	180	160	16,4	246	14,6	1.88
200/160	70.067.2016.11	200/160 SDR11 ISO S-5	200	160	18,2	252	14,6	2.27
225/160	25.067.2216.11	225/160 SDR11 ISO S-5	225	160	20,5	262	14,6	2.76
250/160	25.067.2516.11	250/160 SDR11 ISO S-5	250	160	22,7	314	14,6	3.98
250/200	25.067.2521.11	250/200 SDR11 ISO S-5	250	200	22,7	314	18,2	4.44
250/225	25.067.2522.11	250/225 SDR11 ISO S-5	250	225	22,7	315	20,5	4.74
280/250	25.067.2825.11	280/250 SDR11 ISO S-5	280	250	25,4	355	22,7	6.64
315/200	25.067.3120.11	315/200 SDR11 ISO S-5	315	200	28,6	375	18,2	7.64
315/225	25.067.3122.11	315/225 SDR11 ISO S-5	315	225	28,6	375	20,5	7.84
315/250	25.067.3125.11	315/250 SDR11 ISO S-5	315	250	28,6	375	22,7	8.32

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
110/63	25.067.1163.07	110/63 SDR7,4 ISO S-3,2	110	63	15,1	178	8,6	0.599
110/90	25.067.1190.07	110/90 SDR7,4 ISO S-3,2	110	90	15,1	178	12,3	0.715
125/63	25.067.1263.07	125/63 SDR7,4 ISO S-3,2	125	63	17,1	190	8,6	0.791
125/90	25.067.1290.07	125/90 SDR7,4 ISO S-3,2	125	90	17,1	189	12,3	0.833
125/110	25.067.1211.07	125/110 SDR7,4 ISO S-3,2	125	110	17,1	197,5	15,1	1.04
160/90	25.067.1690.07	160/90 SDR7,4 ISO S-3,2	160	90	21,9	216	12,3	1.475
160/110	25.067.1611.07	160/110 SDR7,4 ISO S-3,2	160	110	21,9	223	15,1	1.564
160/125	25.067.1612.07	160/125 SDR7,4 ISO S-3,2	160	125	21,9	228	17,1	1.79
200/160	25.067.2016.07	200/160 SDR7,4 ISO S-3,2	200	160	27,4	249	21,9	2.98
225/160	70.067.2216.07	225/160 SDR7,4 ISO S-3,2	225	160	30,8	268	21,9	3.88
250/160	25.067.2516.07	250/160 SDR7,4 ISO S-3,2	250	160	34,2	314	21,9	5.4
250/225	25.067.2522.07	250/225 SDR7,4 ISO S-3,2	250	225	34,2	312	30,8	6.6