




**ELGEF Plus Branch saddle topload PE100**  
**d315-1000mm / SDR11 / Outlet d160-d225 mm**

- 10 bar Gas / 16 bar Water
- Branch Saddle installation only with installation set Topload TL225 (799.300.807)
- Angle adaptors (799.350.340) for fusion cable required
- 4 mm pin connectors
- Limited path fusion indicators
- Spigot outlet for butt- and electrofusion
- Full pressure applicable - no derating factor
- With integrated pressure test port for test cap (799.199.287)

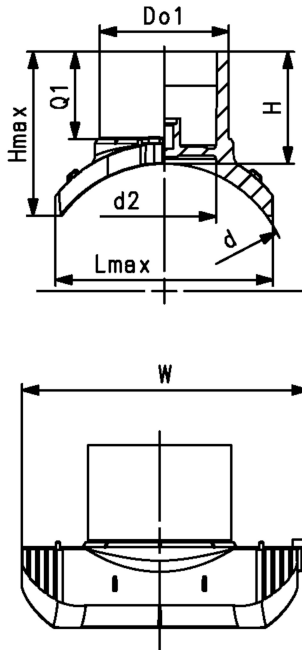

| d    | d2   | Do1  | DN   | PN    | Code               | Weight | Lmax | Q1   | W    | H    | Hmax | SDR pipe |
|------|------|------|------|-------|--------------------|--------|------|------|------|------|------|----------|
| (mm) | (mm) | (mm) | (mm) | (bar) |                    | (kg)   | (mm) | (mm) | (mm) | (mm) | (mm) |          |
| 315  | 129  | 160  | 300  | 16    | <b>193 135 202</b> | 2.548  | 273  | 106  | 322  | 136  | 204  | 11-26    |
| 315  | 177  | 225  | 300  | 16    | <b>193 135 204</b> | 4.625  | 300  | 126  | 360  | 165  | 262  | 11-26    |
| 355  | 129  | 160  | 350  | 16    | <b>193 135 212</b> | 2.348  | 270  | 106  | 320  | 136  | 200  | 11-26    |
| 355  | 177  | 225  | 350  | 16    | <b>193 135 214</b> | 4.594  | 312  | 126  | 354  | 164  | 250  | 11-26    |
| 400  | 129  | 160  | 400  | 16    | <b>193 135 222</b> | 2.623  | 290  | 106  | 320  | 133  | 193  | 11-26    |
| 400  | 177  | 225  | 400  | 16    | <b>193 135 224</b> | 4.612  | 325  | 126  | 364  | 164  | 241  | 11-26    |
| 450  | 129  | 160  | 450  | 16    | <b>193 135 232</b> | 2.429  | 270  | 106  | 320  | 136  | 190  | 11-26    |
| 450  | 177  | 225  | 450  | 16    | <b>193 135 234</b> | 4.301  | 320  | 126  | 364  | 164  | 234  | 11-26    |
| 500  | 129  | 160  | 500  | 16    | <b>193 135 242</b> | 2.690  | 270  | 106  | 320  | 136  | 182  | 11-26    |
| 500  | 177  | 225  | 500  | 16    | <b>193 135 244</b> | 4.569  | 312  | 126  | 354  | 164  | 225  | 11-26    |
| 560  | 129  | 160  | 600  | 16    | <b>193 135 252</b> | 2.495  | 303  | 106  | 320  | 180  | 180  | 11-26    |
| 560  | 177  | 225  | 600  | 16    | <b>193 135 254</b> | 4.321  | 341  | 126  | 364  | 222  | 222  | 11-26    |
| 630  | 129  | 160  | 600  | 16    | <b>193 135 262</b> | 2.616  | 304  | 106  | 320  | 133  | 172  | 11-33    |
| 630  | 177  | 225  | 600  | 16    | <b>193 135 264</b> | 4.750  | 349  | 126  | 364  | 164  | 212  | 11-33    |
| 710  | 129  | 160  | 700  | 16    | <b>193 135 272</b> | 2.504  | 304  | 106  | 320  | 132  | 169  | 11-33    |
| 710  | 177  | 225  | 700  | 16    | <b>193 135 274</b> | 4.360  | 348  | 126  | 360  | 165  | 207  | 11-33    |
| 800  | 129  | 160  | 800  | 16    | <b>193 135 282</b> | 2.399  | 304  | 106  | 320  | 132  | 166  | 11-33    |
| 800  | 177  | 225  | 800  | 16    | <b>193 135 284</b> | 4.553  | 356  | 126  | 360  | 164  | 200  | 11-33    |
| 900  | 177  | 225  | 900  | 16    | <b>193 135 294</b> | 4.390  | 356  | 126  | 360  | 164  | 200  | 11-33    |
| 1000 | 177  | 225  | 1000 | 16    | <b>193 135 304</b> | 4.262  | 356  | 126  | 360  | 164  | 196  | 11-33    |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>