


Elongated Fittings

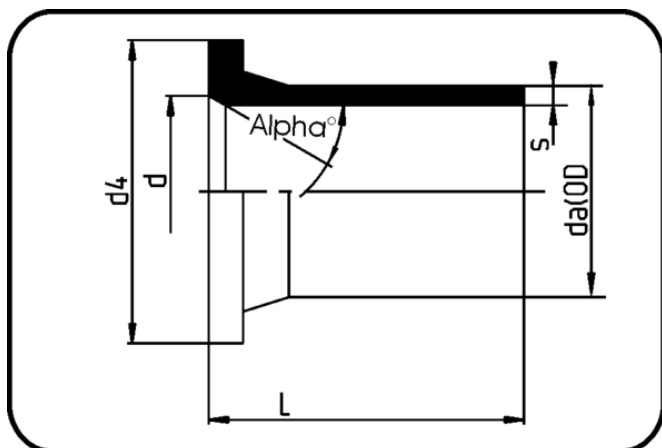

Code: 062.9

- **Chamfered Stub Flange DIN long**

- for butterfly valves
- injection moulded+chamfered

- **Butt + E-socket-welding**

- **PE 100-RC black**

Backing Rings please see Accessories.

Dimension	Code	Detail	da(OD) mm	s mm	L mm	d mm	d4 mm	alph [°]	Weight
110	70.062.9110.17	110X6,6 SDR17 ISO S-8	110	6,6	158	100	158	30	0.58
140	70.062.9140.17	140X8,3 SDR17 ISO S-8	140	8,3	178,5	125	188	30	0.89
160	70.062.9160.17	160X9,5 SDR17 ISO S-8	160	9,5	196,5	150	212	30	1.23
200	70.062.9200.17	200X11,9 SDR17 ISO S-8	200	11,9	208,5	210	268	30	2.1
225	70.062.9225.17	225X13,4 SDR17 ISO S-8	225	13,4	208,5	210	268	30	2.25
250	70.062.9250.17	250X14,8 SDR17 ISO S-8	250	14,8	202	255	320	25	3.2
280	70.062.9280.17	280X16,6 SDR17 ISO S-8	280	16,6	216	255	320	25	3.68
315	70.062.9315.17	315X18,7 SDR17 ISO S-8	315	18,7	217	305	370	25	4.68
355	70.062.9355.17	355X21,1 SDR17 ISO S-8	355	21,1	252	338	430	20	7
400	70.062.9400.17	400X23,7 SDR17 ISO S-8	400	23,7	262	378	482	30	9.4
110	70.062.9110.11	110X10,0 SDR11 ISO S-5	110	10	157	100	158	30	0.7
140	70.062.9140.11	140X12,7 SDR11 ISO S-5	140	12,7	185	125	188	30	1.274
160	70.062.9160.11	160X14,6 SDR11 ISO S-5	160	14,6	197	150	212	30	1.68
180	70.062.9180.11	180X16,4 SDR11 ISO S-5	180	16,4	206	150	212	30	2.02
200	70.062.9200.11	200X18,2 SDR11 ISO S-5	200	18,2	207	210	268	30	2.86
225	70.062.9225.11	225X20,5 SDR11 ISO S-5	225	20,5	207	210	268	30	3.14
250	70.062.9250.11	250X22,7 SDR11 ISO S-5	250	22,7	200	255	320	25	4.2
280	70.062.9280.11	280X25,4 SDR11 ISO S-5	280	25,4	214	255	320	25	5.01
315	70.062.9315.11	315X28,6 SDR11 ISO S-5	315	28,6	234	301	370	22	6.91
355	70.062.9355.11	355X32,2 SDR11 ISO S-5	355	32,2	253	338	430	30	9.8
400	70.062.9400.11	400X36,3 SDR11 ISO S-5	400	36,3	270	378	482	30	13.6