

# **AVK FOUNTAIN POST "VICTORIA", PN 10**

78/7510-001

**Frost proof** 



The AVK Victoria frost proof fountain post is used for sprinkling public areas and gardens. It is designed in a vintage 1900s style, and is equipped with non-return device and a drip tray with demountable grating for easy cleaning. Pipe connection by means of a 1 1/2" BSP cylindric female thread and oval flange.

#### **Product description:**

Frost proof fountain post for parks and gardens for neutral liquids to max. 70°C

#### Features:


- Frost proof
- Trumpet draining system
- Discharge of water by turning the operating knob, which opens the internal shut-off valve
- Equipped with a water saving system with a non-return device
- Drip tray with demountable grating for easy cleaning
- Nozzle has a pin allowing to place a bucket
- · Corrosion protection: Epoxy coating of the duck foot and drawing adaptor, and polyester coating on all cast iron parts
- Pipe connection by means of a 40/49 oval threaded flange.







The designs, materials and specifications shown are subject to change without notice. This is due to the continuous development of our product programme

# Frost proof

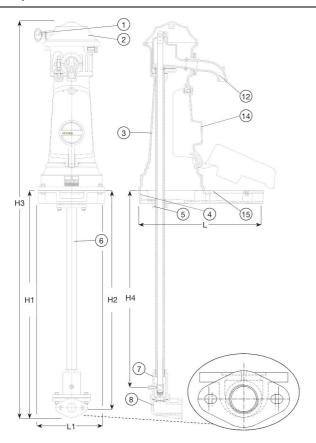





### **Component list:**

4	O a continue to a fe	01' 0 !! 050 (00 05)	44 - E. Lauretta antara	011/
1.	Operating knob	Cast iron GJL-250 (GG-25)	11. Extension stem	Steel / epoxy coat
2.	Bonnet	Cast iron GJL-250 (GG-25)	12. Tap	Cast iron GJL-250 (GG-25)
3.	Body	Cast iron GJL-250 (GG-25)	13. Tank bearing flange	Cast iron GJL-250 (GG-25)
4.	Drip tray	Cast iron GJL-250 (GG-25)	14. Hatch	Cast iron GJL-250 (GG-25)
5.	Flange	Cast iron GJL-250 (GG-25)	15. Grating	Cast iron GJL-250 (GG-25)
6.	Inlet pipe	Steel, galvanized	16. Nozzle	Brass
7.	Inlet adaptor	Cast iron GJL-250 (GG-25)	17. Plug	Brass
8.	Duckfoot	Cast iron GJL-250 (GG-25)	18. Plug sealing joint	EPDM rubber
9.	Lifter	Bronze	19. Water dispenser	Bronze
10.	Operating knob	Cast iron GJL-250 (GG-25)	20. Inlet grating	Brass

Components may be substituted with equivalent or higher class materials without prior notification.

### Reference nos. and dimensions:

AVK ref. no.	DN	H1	H2	НЗ	H4	L	L1	Theoretical
	mm	mm	mm	mm	mm	mm	mm	weight/kg
78-040-7510-100	40	1000	990	1780	900	570	300	100