

UNIFIX MAXI

Suitable for sealing water- or gas-bearing pipes

Available in one, two or three part versions, or with threaded or flanged outlet!


SUITABLE FOR

STEEL PIPES | CAST IRON PIPES | DUCTILE CAST IRON PIPES | FIBRE-CEMENT PIPES

and for sealing in cold water areas

PE PIPES | PVC PIPES

Unifix Maxi clamps can be used in the case of the following damage or installation situations:

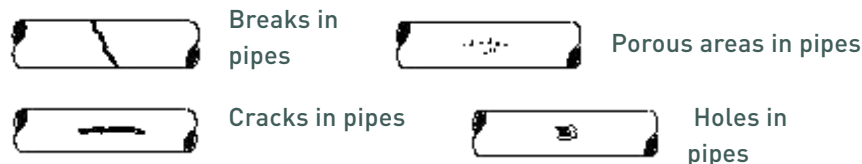

FEATURES OF UNIFIX MAXI CLAMPS


- **Suitable for sealing water- or gas-bearing pipes (note: gas-bearing pipes only outside buildings).**
- **Our sealing clamps are 100% made of 1.4301 (V2A) stainless steel** - similar to AISI 304, and are suitable for quick and permanent repairs of cracked, perforated or porous pipes. For applications that require higher overall strength (wastewater treatment plants, chemical industry, increased chloride content) we offer Maxi clamps made of stainless steel V4A.
- **The bolts** are welded to the clamp, so only the stainless steel bridge is movable. This prevents any part of the clamp from getting lost during assembly work.
- The welding during manufacturing is performed by robots to ensure continuous precision and quality. After welding process, the repair clamps are passivated to protect them against corrosion.
- **The bolts** made of stainless steel. This ensures lifelong durability.
- **The nuts** are coated and guarantee free movement.
- All products are standard equipped with EPDM seals for water-bearing pipes, but are also available with NBR seals for gas (DIN DVGW tested) or viton seals up to max. 200 °C or EPDM-HT for temperatures up to max. 140 °C upon request.
- Regular tests ensure the high quality of the GEBO Unifix series.

SELECTING THE RIGHT MAXI CLAMP WITH THE RIGHT LENGTH

In the following is an overview of the dimensions for which you can use Maxi clamps in one-, two- or three-part versions.

Range: sections [mm]	Maxi 1 (one-part)	Maxi 2 (two-part)	Maxi 3 (three-part)
48 – 87	X		
88–269	X	X	
270–350	X	X	X
351–835		X	X
836–970			X

To determine the correct length of the sealing clamp, add the size of the damaged area (A) and the pipe diameter (B). In the case of PE pipes, add 50% of their value to the sum obtained.



TEMPERATURES: Water up to 60 °C, gas from -5 to +50 °C

OPERATING PRESSURE AND TEMPERATURES:

The permissible pressure stages vary depending on the type of pipe, its outer diameter, type of damage and the use of one-part or multi-part sealing clamp. The following guide line values should be taken as a basis:

The following **guidelines** should therefore be used:

Pipe outer-Ø [mm]	Pressure stage [bar]	
	Water	Gas
MAXI 1 (one-part clamp)		
48–167	16	5
170–350	10	3

Pipe outer-Ø [mm]	Pressure stage [bar]	
	Water	Gas
MAXI 2 (two-part clamp)		
88–168	16	4
176–485	10	3
510–530	6	–

Pipe outer-Ø [mm]	Pressure stage [bar]	
	Water	Gas
MAXI 3 (three-part clamp)		
270–510	10	2
530–610	6	2

Pipe outer-Ø [mm]	Pressure stage [bar]	
	Water	Gas
MAXI 3 (three-part clamp)		
620– 780	4	–
813– 843	3	–
852–1000	2	–



MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP
**EASY
GRIP**
INSTALLATION LENGTH: 150 MM


DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
40	150	48 – 55	51.03.048055.15
	150	52 – 59	51.03.052059.15
50	150	60 – 67	51.03.060067.15
	150	67 – 74	51.03.067074.15
65	150	70 – 77	51.03.070077.15
	150	73 – 80	51.03.073080.15
	150	76 – 85	51.03.076085.15
	150	82 – 90	51.03.082090.15
80	150	87 – 95	51.03.087095.15
	150	90 – 98	51.03.090098.15
	150	95 – 105	51.03.095105.15
	150	98 – 108	51.03.098108.15
	150	102 – 112	51.03.102112.15
	150	106 – 116	51.03.106116.15
100	150	108 – 118	51.03.108118.15
	150	113 – 123	51.03.113123.15
	150	118 – 128	51.03.118128.15
	150	120 – 131	51.03.120131.15
	150	125 – 135	51.03.125135.15
125	150	132 – 144	51.03.132144.15
	150	135 – 145	51.03.135145.15
	150	140 – 152	51.03.140152.15
150	150	151 – 161	51.03.151161.15
	150	159 – 170	51.03.159170.15
	150	165 – 176	51.03.165176.15
	150	167 – 177	51.03.167177.15
	150	170 – 182	51.03.170182.15

As standard, all products are fitted with EPDM sealing for water-bearing pipes. The NBR sealing for water and gas is available at no extra charge. In this case, the article codes start with 50.

MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 200 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
40	200	48 – 55	51.03.048055.20
	200	52 – 59	51.03.052059.20
50	200	60 – 67	51.03.060067.20
	200	67 – 74	51.03.067074.20
65	200	70 – 77	51.03.070077.20
	200	73 – 80	51.03.073080.20
	200	76 – 85	51.03.076085.20
	200	82 – 90	51.03.082090.20
80	200	87 – 95	51.03.087095.20
	200	90 – 98	51.03.090098.20
	200	95 – 105	51.03.095105.20
	200	98 – 108	51.03.098108.20
	200	102 – 112	51.03.102112.20
	200	106 – 116	51.03.106116.20
100	200	108 – 118	51.03.108118.20
	200	113 – 123	51.03.113123.20
	200	118 – 128	51.03.118128.20
	200	120 – 131	51.03.120131.20
	200	125 – 135	51.03.125135.20
125	200	132 – 144	51.03.132144.20
	200	135 – 145	51.03.135145.20
	200	140 – 152	51.03.140152.20
150	200	151 – 161	51.03.151161.20
	200	159 – 170	51.03.159170.20
	200	165 – 176	51.03.165176.20
	200	167 – 177	51.03.167177.20
	200	170 – 182	51.03.170182.20
	200	174 – 184	51.03.174184.20
	200	176 – 186	51.03.176186.20
	200	180 – 191	51.03.180191.20
175	200	186 – 196	51.03.186196.20
	200	193 – 203	51.03.193203.20
	200	200 – 212	51.03.200212.20
200	200	209 – 220	51.03.209220.20
	200	215 – 225	51.03.215225.20
	200	219 – 230	51.03.219230.20



As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 300 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
50	300	60 – 67	51.03.060067.30
	300	67 – 74	51.03.067074.30
65	300	70 – 77	51.03.070077.30
	300	73 – 80	51.03.073080.30
	300	76 – 85	51.03.076085.30
	300	82 – 90	51.03.082090.30
80	300	87 – 95	51.03.087095.30
	300	90 – 98	51.03.090098.30
	300	95 – 105	51.03.095105.30
	300	98 – 108	51.03.098108.30
	300	102 – 112	51.03.102112.30
	300	106 – 116	51.03.106116.30
100	300	108 – 118	51.03.108118.30
	300	113 – 123	51.03.113123.30
	300	118 – 128	51.03.118128.30
	300	120 – 131	51.03.120131.30
	300	125 – 135	51.03.125135.30
125	300	132 – 144	51.03.132144.30
	300	135 – 145	51.03.135145.30
	300	140 – 152	51.03.140152.30
150	300	151 – 161	51.03.151161.30
	300	159 – 170	51.03.159170.30
	300	165 – 176	51.03.165176.30
	300	167 – 177	51.03.167177.30
	300	170 – 182	51.03.170182.30
	300	174 – 184	51.03.174184.30
	300	176 – 186	51.03.176186.30
	300	180 – 191	51.03.180191.30
175	300	186 – 196	51.03.186196.30
	300	193 – 203	51.03.193203.30
	300	200 – 212	51.03.200212.30
200	300	209 – 220	51.03.209220.30
	300	215 – 225	51.03.215225.30
	300	219 – 230	51.03.219230.30
	300	222 – 233	51.03.222233.30
	300	228 – 240	51.03.228240.30
	300	232 – 242	51.03.232242.30
	300	237 – 247	51.03.237247.30
	300	239 – 249	51.03.239249.30
	300	243 – 253	51.03.243253.30
	300	250 – 260	51.03.250260.30
	300	252 – 262	51.03.252262.30
	300	261 – 271	51.03.261271.30
	300	266 – 276	51.03.266276.30
250	300	270 – 280	51.03.270280.30
	300	273 – 284	51.03.273284.30
	300	280 – 293	51.03.280293.30
	300	290 – 300	51.03.290300.30
	300	300 – 310	51.03.300310.30
	300	310 – 320	51.03.310320.30

As standard, all products are fitted with EPDM sealing for water-bearing pipes. The NBR sealing for water and gas is available at no extra charge. In this case, the article codes start with 50.

MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 400 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
65	400	73 – 80	51.03.073080.40
	400	76 – 85	51.03.076085.40
	400	82 – 90	51.03.082090.40
80	400	87 – 95	51.03.087095.40
	400	90 – 98	51.03.090098.40
	400	95 – 105	51.03.095105.40
	400	98 – 108	51.03.098108.40
	400	102 – 112	51.03.102112.40
	400	106 – 116	51.03.106116.40
100	400	108 – 118	51.03.108118.40
	400	113 – 123	51.03.113123.40
	400	118 – 128	51.03.118128.40
	400	120 – 131	51.03.120131.40
	400	125 – 135	51.03.125135.40
125	400	132 – 144	51.03.132144.40
	400	135 – 145	51.03.135145.40
	400	140 – 152	51.03.140152.40
150	400	151 – 161	51.03.151161.40
	400	159 – 170	51.03.159170.40
	400	165 – 176	51.03.165176.40
	400	167 – 177	51.03.167177.40
	400	170 – 182	51.03.170182.40
	400	174 – 184	51.03.174184.40
	400	176 – 186	51.03.176186.40
	400	180 – 191	51.03.180191.40
175	400	186 – 196	51.03.186196.40
	400	193 – 203	51.03.193203.40
	400	200 – 212	51.03.200212.40
200	400	209 – 220	51.03.209220.40
	400	215 – 225	51.03.215225.40
	400	219 – 230	51.03.219230.40
	400	222 – 233	51.03.222233.40
	400	228 – 240	51.03.228240.40
	400	232 – 242	51.03.232242.40
	400	237 – 247	51.03.237247.40
	400	239 – 249	51.03.239249.40
	400	243 – 253	51.03.243253.40
	400	250 – 260	51.03.250260.40
	400	252 – 262	51.03.252262.40
250	400	261 – 271	51.03.261271.40
	400	266 – 276	51.03.266276.40
	400	270 – 280	51.03.270280.40
	400	273 – 284	51.03.273284.40
	400	280 – 293	51.03.280293.40
	400	290 – 300	51.03.290300.40
300	400	300 – 310	51.03.300310.40
	400	310 – 320	51.03.310320.40
	400	315 – 326	51.03.315326.40
	400	320 – 330	51.03.320330.40
	400	325 – 335	51.03.325335.40
	400	334 – 346	51.03.334346.40
	400	340 – 350	51.03.340350.40
	400	350 – 360	51.03.350360.40



As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 500 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
100	500	108 – 118	51.03.108118.50
	500	113 – 123	51.03.113123.50
	500	118 – 128	51.03.118128.50
	500	120 – 131	51.03.120131.50
	500	125 – 135	51.03.125135.50
125	500	132 – 144	51.03.132144.50
	500	135 – 145	51.03.135145.50
	500	140 – 152	51.03.140152.50
150	500	151 – 161	51.03.151161.50
	500	159 – 170	51.03.159170.50
	500	165 – 176	51.03.165176.50
	500	167 – 177	51.03.167177.50
	500	170 – 182	51.03.170182.50
	500	174 – 184	51.03.174184.50
	500	176 – 186	51.03.176186.50
	500	180 – 191	51.03.180191.50
175	500	186 – 196	51.03.186196.50
	500	193 – 203	51.03.193203.50
	500	200 – 212	51.03.200212.50
200	500	209 – 220	51.03.209220.50
	500	215 – 225	51.03.215225.50
	500	219 – 230	51.03.219230.50
	500	222 – 233	51.03.222233.50
	500	228 – 240	51.03.228240.50
	500	232 – 242	51.03.232242.50
	500	237 – 247	51.03.237247.50
	500	239 – 249	51.03.239249.50
	500	243 – 253	51.03.243253.50
	500	250 – 260	51.03.250260.50
	500	252 – 262	51.03.252262.50
	500	261 – 271	51.03.261271.50
250	500	266 – 276	51.03.266276.50
	500	270 – 280	51.03.270280.50
	500	273 – 284	51.03.273284.50
	500	280 – 293	51.03.280293.50
	500	290 – 300	51.03.290300.50
	500	300 – 310	51.03.300310.50
300	500	310 – 320	51.03.310320.50
	500	315 – 326	51.03.315326.50
	500	320 – 330	51.03.320330.50
	500	325 – 335	51.03.325335.50
	500	334 – 346	51.03.334346.50
	500	340 – 350	51.03.340350.50
	500	350 – 360	51.03.350360.50

MAXI 1 - ONE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 600 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
200	600	215 – 225	51.03.215225.60
	600	219 – 230	51.03.219230.60
	600	222 – 233	51.03.222233.60
	600	228 – 240	51.03.228240.60
	600	232 – 242	51.03.232242.60
	600	237 – 247	51.03.237247.60
	600	239 – 249	51.03.239249.60
	600	243 – 253	51.03.243253.60
	600	250 – 260	51.03.250260.60
	600	252 – 262	51.03.252262.60
	600	261 – 271	51.03.261271.60
	600	266 – 276	51.03.266276.60
250	600	270 – 280	51.03.270280.60
	600	273 – 284	51.03.273284.60
	600	280 – 293	51.03.280293.60
	600	290 – 300	51.03.290300.60
	600	300 – 310	51.03.300310.60
	600	310 – 320	51.03.310320.60
300	600	315 – 326	51.03.315326.60
	600	320 – 330	51.03.320330.60
	600	325 – 335	51.03.325335.60
	600	334 – 346	51.03.334346.60
	600	340 – 350	51.03.340350.60
	600	350 – 360	51.03.350360.60



As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

MAXI 2 - TWO-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 200 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
80	200	88 – 110	51.04.088110.20
	200	100 – 120	51.04.100120.20
100	200	108 – 128	51.04.108128.20
	200	112 – 134	51.04.112134.20
	200	120 – 140	51.04.120140.20
125	200	133 – 156	51.04.133156.20
	200	138 – 160	51.04.138160.20
150	200	158 – 180	51.04.158180.20
	200	165 – 185	51.04.165185.20
	200	168 – 190	51.04.168190.20
	200	176 – 196	51.04.176196.20
175	200	190 – 210	51.04.190210.20
	200	195 – 217	51.04.195217.20
200	200	210 – 230	51.04.210230.20
	200	216 – 238	51.04.216238.20
	200	225 – 246	51.04.225246.20
	200	230 – 250	51.04.230250.20

INSTALLATION LENGTH: 300 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
80	300	88 – 110	51.04.088110.30
	300	100 – 120	51.04.100120.30
100	300	108 – 128	51.04.108128.30
	300	112 – 134	51.04.112134.30
	300	120 – 140	51.04.120140.30
125	300	133 – 156	51.04.133156.30
	300	138 – 160	51.04.138160.30
150	300	158 – 180	51.04.158180.30
	300	165 – 185	51.04.165185.30
	300	168 – 190	51.04.168190.30
	300	176 – 196	51.04.176196.30
175	300	190 – 210	51.04.190210.30
	300	195 – 217	51.04.195217.30
200	300	210 – 230	51.04.210230.30
	300	216 – 238	51.04.216238.30
	300	225 – 246	51.04.225246.30
	300	230 – 250	51.04.230250.30
	300	238 – 260	51.04.238260.30
	300	250 – 271	51.04.250271.30
	300	269 – 289	51.04.269289.30
250	300	273 – 293	51.04.273293.30
	300	282 – 302	51.04.282302.30
	300	295 – 315	51.04.295315.30

MAXI 2 - TWO-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 300 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
300	300	314 – 335	51.04.314335.30
	300	322 – 344	51.04.322344.30
	300	337 – 358	51.04.337358.30
350	300	347 – 368	51.04.347368.30
	300	365 – 385	51.04.365385.30



LENGTH: 400 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
80	400	88 – 110	51.04.088110.40
	400	100 – 120	51.04.100120.40
100	400	108 – 128	51.04.108128.40
	400	112 – 134	51.04.112134.40
	400	120 – 140	51.04.120140.40
125	400	133 – 156	51.04.133156.40
	400	138 – 160	51.04.138160.40
150	400	158 – 180	51.04.158180.40
	400	165 – 185	51.04.165185.40
	400	168 – 190	51.04.168190.40
	400	176 – 196	51.04.176196.40
175	400	190 – 210	51.04.190210.40
	400	195 – 217	51.04.195217.40
200	400	210 – 230	51.04.210230.40
	400	216 – 238	51.04.216238.40
	400	225 – 246	51.04.225246.40
	400	230 – 250	51.04.230250.40
	400	238 – 260	51.04.238260.40
	400	250 – 271	51.04.250271.40
250	400	269 – 289	51.04.269289.40
	400	273 – 293	51.04.273293.40
	400	282 – 302	51.04.282302.40
300	400	295 – 315	51.04.295315.40
	400	314 – 335	51.04.314335.40
	400	322 – 344	51.04.322344.40
350	400	337 – 358	51.04.337358.40
	400	347 – 368	51.04.347368.40
	400	365 – 385	51.04.365385.40
400	400	382 – 402	51.04.382402.40
	400	396 – 420	51.04.396420.40
	400	410 – 430	51.04.410430.40
	400	420 – 440	51.04.420440.40



As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

MAXI 2 - TWO-PART STAINLESS STEEL SEALING CLAMP
**EASY
GRIP**
INSTALLATION LENGTH: 500 MM


DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
80	500	88 – 110	51.04.088110.50
	500	100 – 120	51.04.100120.50
100	500	108 – 128	51.04.108128.50
	500	112 – 134	51.04.112134.50
	500	120 – 140	51.04.120140.50
125	500	133 – 156	51.04.133156.50
	500	138 – 160	51.04.138160.50
150	500	158 – 180	51.04.158180.50
	500	165 – 185	51.04.165185.50
	500	168 – 190	51.04.168190.50
	500	176 – 196	51.04.176196.50
175	500	190 – 210	51.04.190210.50
	500	195 – 217	51.04.195217.50
200	500	210 – 230	51.04.210230.50
	500	216 – 238	51.04.216238.50
	500	225 – 246	51.04.225246.50
	500	230 – 250	51.04.230250.50
	500	238 – 260	51.04.238260.50
	500	250 – 271	51.04.250271.50
	500	269 – 289	51.04.269289.50
250	500	273 – 293	51.04.273293.50
	500	282 – 302	51.04.282302.50
	500	295 – 315	51.04.295315.50
300	500	314 – 335	51.04.314335.50
	500	322 – 344	51.04.322344.50
	500	337 – 358	51.04.337358.50
350	500	347 – 368	51.04.347368.50
	500	365 – 385	51.04.365385.50
	500	382 – 402	51.04.382402.50
	500	396 – 420	51.04.396420.50
400	500	410 – 430	51.04.410430.50
	500	420 – 440	51.04.420440.50
	500	435 – 455	51.04.435455.50
	500	450 – 470	51.04.450470.50
450	500	457 – 477	51.04.457477.50
	500	485 – 508	51.04.485508.50
500	500	510 – 530	51.04.510530.50

MAXI 2 - TWO-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 600 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
300	600	314 – 335	51.04.314335.60
	600	322 – 344	51.04.322344.60
	600	337 – 358	51.04.337358.60
350	600	347 – 368	51.04.347368.60
	600	365 – 385	51.04.365385.60
	600	382 – 402	51.04.382402.60
	600	396 – 420	51.04.396420.60
400	600	410 – 430	51.04.410430.60
	600	420 – 440	51.04.420440.60
	600	435 – 455	51.04.435455.60
	600	450 – 470	51.04.450470.60
450	600	457 – 477	51.04.457477.60
	600	485 – 508	51.04.485508.60
500	600	510 – 530	51.04.510530.60




As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

Up to 855 mm outside pipe diameter and installation length 800 mm
also available upon request.

MAXI 3 - THREE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 300 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
250	300	270 – 300	51.05.270300.30
300	300	310 – 340	51.05.310340.30
	300	335 – 365	51.05.335365.30
	300	340 – 370	51.05.340370.30
350	300	360 – 390	51.05.360390.30
	300	385 – 415	51.05.385415.30
	300	395 – 425	51.05.395425.30
	300	400 – 430	51.05.400430.30
400	300	410 – 440	51.05.410440.30
	300	430 – 460	51.05.430460.30
	300	435 – 465	51.05.435465.30
	300	440 – 470	51.05.440470.30
450	300	460 – 490	51.05.460490.30

INSTALLATION LENGTH: 400 MM




DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
250	400	270 – 300	51.05.270300.40
300	400	310 – 340	51.05.310340.40
	400	335 – 365	51.05.335365.40
350	400	340 – 370	51.05.340370.40
	400	360 – 390	51.05.360390.40
	400	385 – 415	51.05.385415.40
	400	395 – 425	51.05.395425.40
400	400	400 – 430	51.05.400430.40
	400	410 – 440	51.05.410440.40
	400	430 – 460	51.05.430460.40
	400	435 – 465	51.05.435465.40
450	400	440 – 470	51.05.440470.40
	400	460 – 490	51.05.460490.40
	400	475 – 505	51.05.475505.40
500	400	485 – 515	51.05.485515.40

MAXI 3 - THREE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 500 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
350	500	360 – 390	51.05.360390.50
	500	385 – 415	51.05.385415.50
	500	395 – 425	51.05.395425.50
400	500	400 – 430	51.05.400430.50
	500	410 – 440	51.05.410440.50
	500	430 – 460	51.05.430460.50
	500	435 – 465	51.05.435465.50
450	500	440 – 470	51.05.440470.50
	500	460 – 490	51.05.460490.50
	500	475 – 505	51.05.475505.50
500	500	485 – 515	51.05.485515.50
	500	510 – 540	51.05.510540.50
	500	530 – 560	51.05.530560.50



INSTALLATION LENGTH: 600 MM

DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
400	600	435 – 465	51.05.435465.60
450	600	440 – 470	51.05.440470.60
	600	460 – 490	51.05.460490.60
	600	475 – 505	51.05.475505.60
500	600	485 – 515	51.05.485515.60
	600	510 – 540	51.05.510540.60
	600	530 – 560	51.05.530560.60
	600	535 – 565	51.05.535565.60
	600	555 – 585	51.05.555585.60
	600	570 – 600	51.05.570600.60
600	600	585 – 615	51.05.585615.60
	600	610 – 640	51.05.610640.60
	600	620 – 650	51.05.620650.60
	600	630 – 660	51.05.630660.60
	600	654 – 684	51.05.654684.60
	600	702 – 732	51.05.702732.60
700	600	711 – 741	51.05.711741.60
	600	747 – 777	51.05.747777.60
750	600	780 – 810	51.05.780810.60
	600	813 – 843	51.05.813843.60
	600	852 – 882	51.05.852882.60
800	600	864 – 894	51.05.864894.60
	600	900 – 930	51.05.900930.60
	600	925 – 955	51.05.925955.60
900	600	945 – 975	51.05.945975.60
	600	970 – 1000	51.05.9701000.60




As standard, all products are fitted with EPDM sealing for water-bearing pipes.
The NBR sealing for water and gas is available at no extra charge.
In this case, the article codes start with 50.

MAXI 3 - THREE-PART STAINLESS STEEL SEALING CLAMP

EASY
GRIP

INSTALLATION LENGTH: 700 MM



DN	Installation length [mm]	Pipe outer-Ø [mm]	Code
400	700	435 - 465	51.05.435465.70
450	700	440 - 470	51.05.440470.70
	700	460 - 490	51.05.460490.70
	700	475 - 505	51.05.475505.70
500	700	485 - 515	51.05.485515.70
	700	510 - 540	51.05.510540.70
	700	530 - 560	51.05.530560.70
	700	535 - 565	51.05.535565.70
	700	555 - 585	51.05.555585.70
	700	570 - 600	51.05.570600.70
600	700	585 - 615	51.05.585615.70
	700	610 - 640	51.05.610640.70
	700	620 - 650	51.05.620650.70
	700	630 - 660	51.05.630660.70
	700	654 - 684	51.05.654684.70
700	700	702 - 732	51.05.702732.70
	700	711 - 741	51.05.711741.70
750	700	747 - 777	51.05.747777.70
	700	780 - 810	51.05.780810.70
800	700	813 - 843	51.05.813843.70
	700	852 - 882	51.05.852882.70
	700	864 - 894	51.05.864894.70
900	700	900 - 930	51.05.900930.70
	700	925 - 955	51.05.925955.70
	700	945 - 975	51.05.945975.70
	700	970 - 1000	51.05.9701000.70

As standard, all products are fitted with EPDM sealing for water-bearing pipes. The NBR sealing for water and gas is available at no extra charge. In this case, the article codes start with 50.