



AVK EXTENSION SPINDLE, TELESCOPIC

04/F-016

For gate valves DN450-600, key adaptor #23-32, Ø30 mm stem adaptor

AVK telescopic extension spindles are designed for ease of use and long service life. The two fixation lugs can be attached to AVK surface boxes, a lock spring prevents the telescopic part from collapsing during installation. The extension spindles are made of corrosion-free materials and the centre sleeve and bottom cover protect against penetration of impurities.

Product description:

Telescopic extension spindle for gate valves DN450-600, key adaptor #23-32. For water, neutral liquids and gas.

Features:

- The conical key adaptor fits most standard T-keys
- The two fixation lugs can be attached to AVK surface boxes and support tiles
- A lock spring prevents the telescopic part from collapsing during installation, as it creates friction inside the inner square tube
- The center sleeve protects against penetration of impurities between the two outer PE pipes
- The inner tube is press fit to the key adapter for maximum strength
- The bottom cover protects the valve spindle from sand and dirt and enables it to rotate freely
- Available in different lengths, L8 = Actual length




Expect... **AVK**

AVK EXTENSION SPINDLE, TELESCOPIC

04/F-016

For gate valves DN450-600, key adaptor #23-32, Ø30 mm stem adaptor

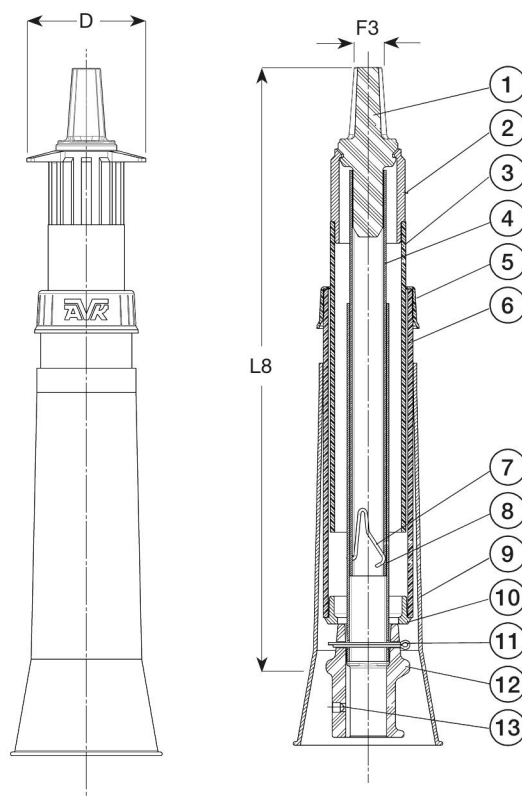

Component list:

1. Key adaptor	Stainless steel	8. Lower inner tube	Stainless steel
2. Top cover	PE	9. Bottom connector	PE
3. Upper cover pipe	PE	10. Bottom cover	PE
4. Upper inner tube	Stainless steel	11. Split pin	Stainless steel
5. Centre sleeve	PP	12. Spindle adaptor	Stainless steel
6. Lower cover pipe	PE	13. Set screw	Stainless steel
7. Lock spring	Stainless steel		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	L8 mm	D mm	F3 mm	Theoretical weight/kg
04-830-4-000202	450-600	450 - 650	98	23 - 32	4.8
04-830-4-050202	450-600	600 - 950	98	23 - 32	5.4
04-830-4-100202	450-600	900 - 1550	98	23 - 32	6.6
04-830-4-120202	450-600	1500 - 2750	98	23 - 32	9.1
04-830-4-150202	450-600	1700 - 2900	98	23 - 32	9.5
04-830-4-220202	450-600	2700 - 5150	98	23 - 32	14